



400 SS



300 SS



316 SS

Mini Hose Clamps


- Under RoHS & REACH Standard
- 3.0 Nm tightening torque is higher than common 8mm band width hose clamps
- The punched perforated band enables clamps to install easily and hold strong, and it is flexible for various conditions
- Multi-range hose clamps
- Material and clamping range are stamped on clamps
- Various packaging are available on request

Mini Hose Clamps

- 3/8" (9 mm) Band Width



Mini Hose Clamps are innovated design with 9 mm band width, the tightening torque is 3.0 Nm.

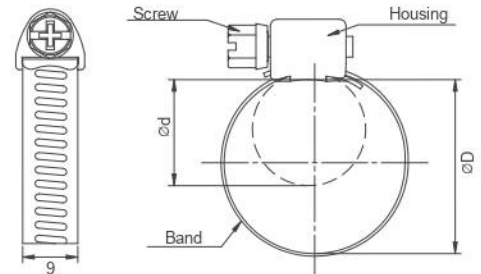

400 SS	0.6t x 9w Band	Housing	1/4"(6.4mm) Hex Head Screw
	430 S.S.	430 S.S.	Plated Carbon Steel

300 SS	0.6t x 9w Band	Housing	1/4"(6.4mm) Hex Head Screw
	304 S.S.	304 S.S.	304 S.S.

316 SS	0.6t x 9w Band	Housing	1/4"(6.4mm) Hex Head Screw
	316 S.S.	316 S.S.	316 S.S.

SAE SIZE	Clamping Range				Part Number		
	inch		mm		400 S.S. (W2)	300 S.S. (W4)	316 S.S. (W5)
	Min.	Max.	Min.	Max.	3.0 Nm	3.5 Nm	3.5 Nm
2	1/4	1/2	6	13	Y229-09W013	Y249-09W013	Y259-09W013
4	5/16	5/8	8	16	Y229-09W016	Y249-09W016	Y259-09W016
5	7/16	3/4	11	20	Y229-09W020	Y249-09W020	Y259-09W020
6	1/2	7/8	12	23	Y229-09W023	Y249-09W023	Y259-09W023
8	1/2	1	13	25	Y229-09W025	Y249-09W025	Y259-09W025
10	9/16	1-1/16	14	27	Y229-09W027	Y249-09W027	Y259-09W027