



400 SS



300 SS



316 SS

Worm Drive Hose Clamps


- In accordance with SAE J1508 standard
- Under RoHS & REACH standard
- The punched perforated band enables clamps to install easily and hold strong, and it is flexible for various conditions
- Multi-range hose clamps
- Material and clamping range are stamped on clamps
- Larger diameters are available on request
- Various packaging are available on request

Worm Drive Hose Clamps

-1/2" (12.7 mm) Band Width



1/2" (12.7 mm) band width Worm Drive Hose Clamps are our common type, which are suitable for various industrial applications.

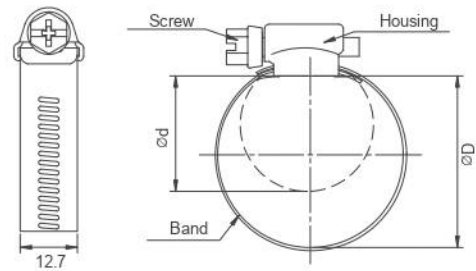

400 SS	0.6t x 12.7w Band	Housing	5/16" (7.9mm) Hex Head Screw
	430 S.S.	430 S.S.	Plated Carbon Steel

300 SS	0.6t x 12.7w Band	Housing	5/16" (7.9mm) Hex Head Screw
	304 S.S.	304 S.S.	304 S.S.

316 SS	0.6t x 12.7w Band	Housing	5/16" (7.9mm) Hex Head Screw
	316 S.S.	316 S.S.	316 S.S.

SAE SIZE	Clamping Range				Part Number		
	inch		mm		400 S.S. (W2)	300 S.S. (W4)	316 S.S. (W5)
	Min.	Max.	Min.	Max.	4.0 Nm	4.5 Nm	4.5 Nm
6	1/2	7/8	12	23	Y221-12.7W023	Y241-12.7W023	Y251-12.7W023
8	1/2	1	13	25	Y221-12.7W025	Y241-12.7W025	Y251-12.7W025
10	9/16	1-1/16	14	27	Y221-12.7W027	Y241-12.7W027	Y251-12.7W027
12	11/16	1-1/4	17	32	Y221-12.7W032	Y241-12.7W032	Y251-12.7W032
16	11/16	1-1/2	17	38	Y221-12.7W038	Y241-12.7W038	Y251-12.7W038
20	13/16	1-3/4	21	44	Y221-12.7W044	Y241-12.7W044	Y251-12.7W044
24	1	2	25	51	Y221-12.7W051	Y241-12.7W051	Y251-12.7W051
28	1-1/4	2-1/4	32	57	Y221-12.7W057	Y241-12.7W057	Y251-12.7W057
32	1-1/2	2-1/2	38	63	Y221-12.7W063	Y241-12.7W063	Y251-12.7W063
36	1-3/4	2-3/4	44	70	Y221-12.7W070	Y241-12.7W070	Y251-12.7W070
40	2	3	51	76	Y221-12.7W076	Y241-12.7W076	Y251-12.7W076
44	2-1/4	3-1/4	57	82	Y221-12.7W082	Y241-12.7W082	Y251-12.7W082
48	2-1/2	3-1/2	64	89	Y221-12.7W089	Y241-12.7W089	Y251-12.7W089
52	2-3/4	3-3/4	70	95	Y221-12.7W095	Y241-12.7W095	Y251-12.7W095
56	3	4	76	102	Y221-12.7W102	Y241-12.7W102	Y251-12.7W102
60	3-1/4	4-1/4	82	108	Y221-12.7W108	Y241-12.7W108	Y251-12.7W108
64	3-1/2	4-1/2	89	114	Y221-12.7W114	Y241-12.7W114	Y251-12.7W114
72	4	5	102	127	Y221-12.7W127	Y241-12.7W127	Y251-12.7W127
80	4-1/2	5-1/2	114	140	Y221-12.7W140	Y241-12.7W140	Y251-12.7W140
88	5	6	127	152	Y221-12.7W152	Y241-12.7W152	Y251-12.7W152
96	5-1/2	6-1/2	140	165	Y221-12.7W165	Y241-12.7W165	Y251-12.7W165
104	6	7	152	178	Y221-12.7W178	Y241-12.7W178	Y251-12.7W178